


Anti Spatter Applicator / Front Injector TMS-VI

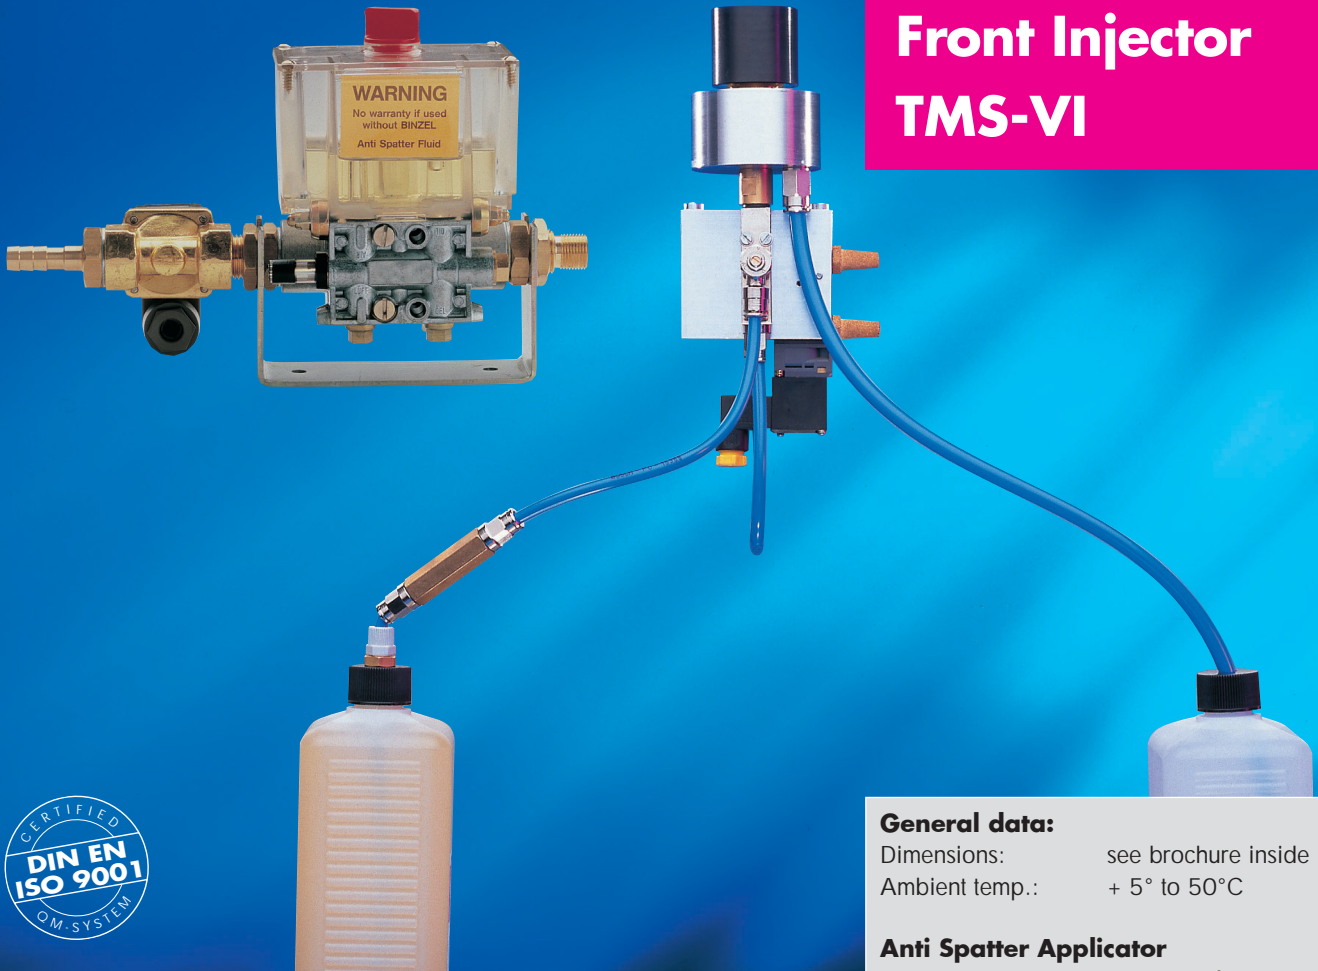

Description

Anti Spatter Injector and Applicator 24 V DC / 42 V AC
 Anti Spatter Injector and Applicator 110 V AC
 Front Injector TMS-VI

Ident-No.

832.0025
 832.0027
 830.1110

General data:

Dimensions: see brochure inside
 Ambient temp.: + 5° to 50°C

Anti Spatter Applicator

Feed volume: 3 - 30 mm³/stroke
 Air connection: G 1/2" IG
 (hose socket Ø 11.5 mm)
 Connection/Output: G 3/8" AG
 Working pressure: 5 - 10 bar

Electrical equipment

Solenoid Valve: 24 V DC / 42 V AC
 5 W; 6 VA; approx. 12VA
 110 V DC
 5 W; 6 VA; approx. 12VA

Front Injector TMS-VI

Pneumatics

Working pressure: 5 - 10 bar
 Internal dia.: Ø 4 mm


5/2 solenoid valve

Air connection: G 1/8"
 Nominal Flow: approx. 650 l/min.
 Input signal: 24 VDC
 I_{max} ≤ 1,1 A
 I_{nom.} = 220 mA


Welding & cutting brought to the point.



Anti Spatter Injector and Applicator

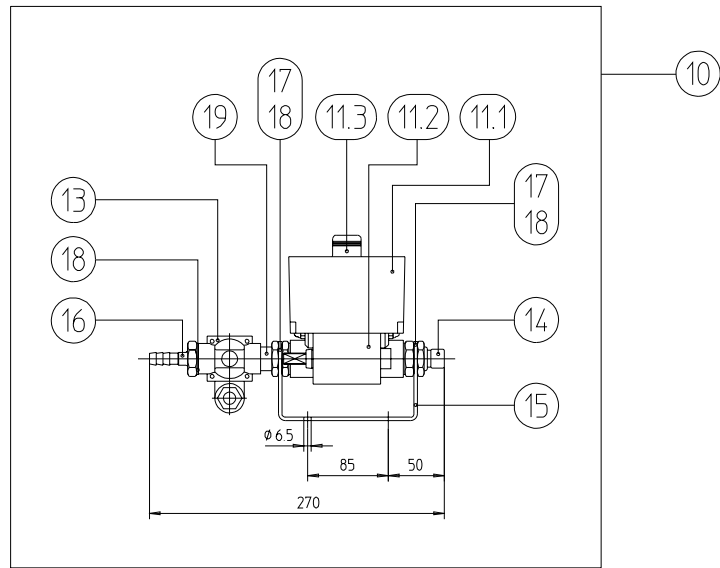

Front Injector TMS-VI

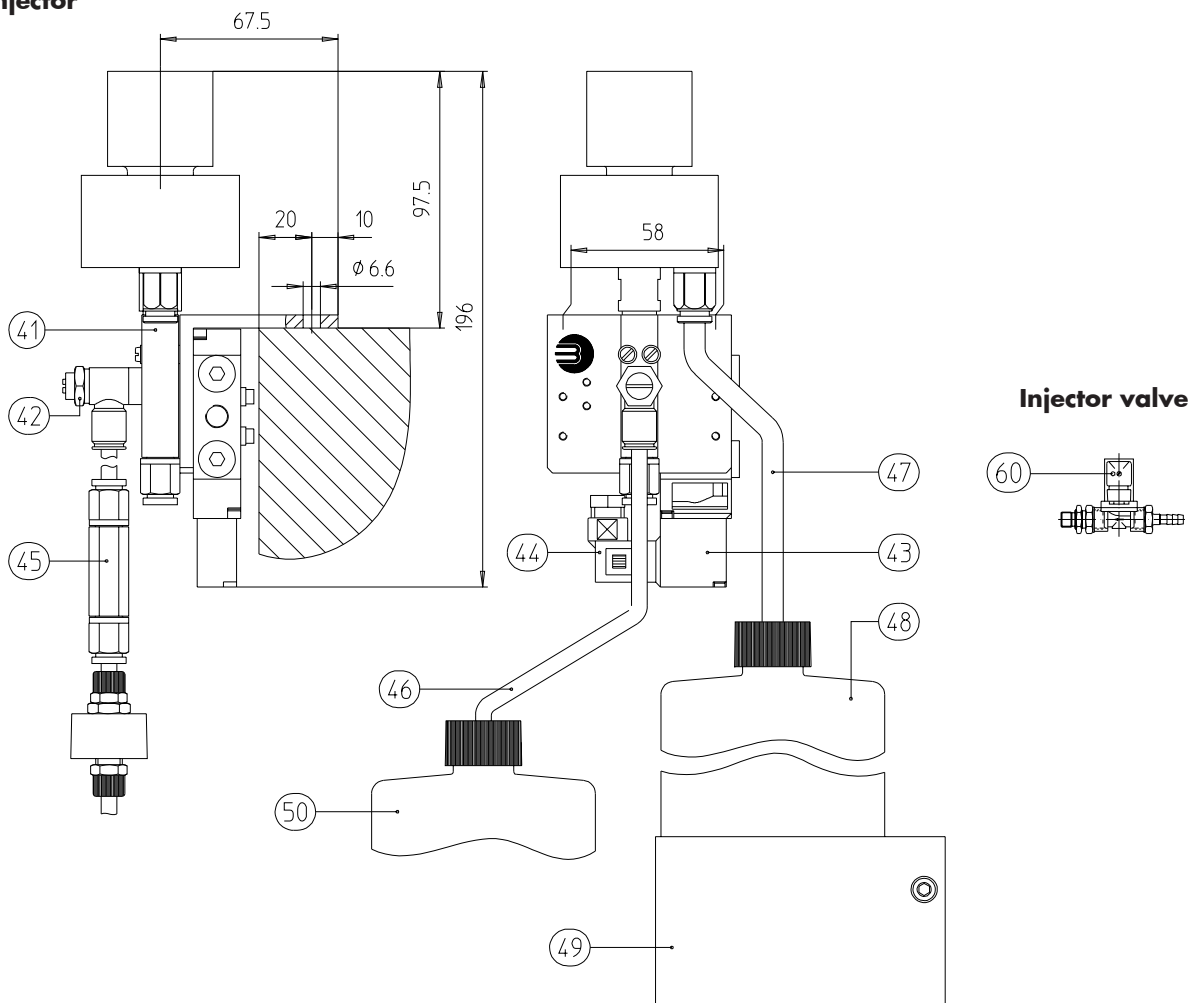

Build group	Pos.	Description	Specifications	Ident-No.	
Anti Spatter Applicator	10	Anti Spatter Applicator 24 V DC / 42 V AC		832.0025	
		Anti Spatter Applicator 110 V DC		832.0027	
	11	Injector, cpl. with tank 0.25 l		832.0029	
	11.1	Tank, cpl. w/ plug		832.0042	
	11.2	Injector		832.0043	
	11.3	Plug		832.0045	
	w/o fig.	Seal kit for spatter unit		832.0044	
	w/o fig.	Repair kit for Injector		832.0055	
	13	2-Way valve 24 V DC / 42 V AC		832.0010	
		2-Way valve 110 V AC		832.0012	
	14	Connector piece		832.0014	
	15	Frame		832.0030	
	16	Hose connector G 1/2" / ID 11		832.0016	
	17	Nut G 1/2"		832.0018	
	18	Gasket	10 pcs.	830.0052	
	19	male adaptor		832.0017	
	w/o fig.	Operating instruction Anti Spatter Applicator		BAL.0059	
	Front Injector TMS-VI	40	TMS-VI cpl.		830.1110
		41	Venturi valve G1/8"		832.0039
42		Throttle valve G1/8"		832.0040	
43		5/2 solenoid valve G1/8" 24 V DC		834.0112	
44		Connector socket		834.0113	
45		Nonreturn valve G1/8"		830.1510	
46		Plastic hose, ID=4 mm		176.0003	
47		Plastic hose, ID=6 mm		176.0008	
48		Plastainer (1l) w/plug; empty		830.1516	
49		Holder cpl.		830.1519	
w/o fig.	Operating instruction Front Injector TMS-VI		BAL.0097		
Injector valve	60	Solenoid valve, Servo-Assisted (NB 10 mm) f. 24 V DC 10/42 V AC		832.0005	
		Solenoid valve, Servo-Assisted (NB 10 mm) f. 110 V AC 10 mm		832.0007	
Accessories	50	Anti spatter fluid 1l		192.0056	
	w/o fig.	Anti spatter fluid 5l		192.0052	
	w/o fig.	Anti spatter fluid 20l		192.0048	
	w/o fig.	Anti spatter fluid 200l		192.0046	

Welding & cutting brought to the point.



Alexander Binzel Schweisstechnik GmbH & Co. KG
P.O. Box 10 01 53 · D-35331 Giessen
Tel.: ++49 (0) 64 08 / 59-0
Fax: ++49 (0) 64 08 / 59-141
<http://www.binzel-abicor.com>